

## WYKAMOL TANKING SLURRY

Wykamol Tanking Slurry is a cementitious waterproofing system which creates a monolithic bond using crystalline chemicals when applied to concrete and masonry structures.



When mixed with clean water and applied correctly, Wykamol Tanking Slurry forms a permanent waterproof coating to the concrete and masonry and is easily applied by brush, roller or spray.

Wykamol Tanking Slurry waterproofs against positive and negative hydrostatic heads of water and is suitable for use, internally, externally, above and below ground. Wykamol Tanking slurry is ideal for use as part of a damp-proofing course (DPC) and is an excellent radon barrier, passing all the relevant tests for resistance to this gas.

### ADVANTAGES

- Permanent waterproofing for concrete and masonry.
- Resists positive and negative water pressure.
- Superior bond strength.
- Resists salt contamination in masonry.
- Suitable for use above and below ground level, for internal and external use.
- Safe to use in contact with potable water.
- Easy to use, brush, roller or spray applied.
- Ideal radon barrier (certified when applied correctly)

**Note:** When applying Wykamol Tanking Slurry to a structure housing aquatic life, overcoating with Wykamol Technoseal DPM in line with the relevant data sheet is necessary, which is available upon request or can be downloaded from our website.

### TYPICAL USES

A permanent damp-proof course, particularly on rubble filled walls where a chemical damp-proofing cream, such as Ultracure, cannot be used.

Waterproofing of: Basements, cellars, swimming pools, brickwork, block work structures, concrete and renders.

# TECHNICAL DATASHEET

## SUBSTRATE PREPARATION

All active water leaks must be stopped using Waterstop (rapid setting plugging compound) before continuing to the next stage of application.

### Uneven surfaces:

Remove by suitable means, all loose pointing, any remaining render or plaster, wood, dust, grease, oil, organic growth or other foreign materials that may cause contamination or adversely affect adhesion properties. To create a level surface, Universal Mortar should be applied in line with the relevant data sheet, which is available upon request or can be downloaded from our website. Follow the Universal Mortar priming requirements before application.

### Level Surfaces:

If there is any exposed steel present, apply two coats of suitable corrosion inhibitor to the exposed steel, by brush. Remove all loose material and surface latencies, i.e. dust, oil, grease, corrosion and organic growth, preferably by using wet grit or water blasting techniques. The strength of the concrete subbase must be a minimum of 25 N/mm<sup>2</sup>.

**Note:** Special precautions may be necessary to ensure a continuous waterproof barrier at the wall to floor joints and corner joints. This is to avoid sharp changes of angle in the tanking membrane. The joints should be thoroughly raked out and cleaned prior to an application of Universal Mortar as a fillet seal.

### Priming:

- Using a brush, roller or spray, apply SBR Latex, mixed 1:1 (by volume) with water.
- Allow to become tacky to the touch. This will take approx. 30 mins to 2 hours.

## MIXING

Wykamol Tanking Slurry's consistency can be varied to suit the application method.

### Required Water Additions

| Pack Size | Brush Applied  | Trowel Applied   | Spray Applied    |
|-----------|----------------|------------------|------------------|
| 20Kg      | 3.2 - 4 litres | 3.2 - 3.6 litres | 3.5 - 4.2 litres |

When mixing Wykamol Tanking Slurry, use ONLY CLEAN WATER, a clean mixing vessel and a mechanical mixer.

1. Pour minimum required addition of clean water in to the mixing vessel.
2. Using an electric paddle, gradually start to add the powder whilst mixing under low shear to reduce dust generation.

3. Add all powder and increase mixing shear.

4. Mix for approx. 1 - 3 mins to achieve a uniform, lump free slurry.

5. If necessary, gradually add water and mix until desired consistency is achieved. **Do not exceed maximum required water additions as this will result in the product becoming ineffective as a waterproof barrier.**

**Note:** Excessive mechanical mixing should be avoided. Mechanical mixing time must not exceed 5 minutes.

## APPLICATION

Wykamol Tanking Slurry is a minimum 2 coat application, with each layer applied at a uniform thickness of at least 1 mm per coat.

**For use as a radon barrier, apply coats at a minimum thickness of 2.5 - 3 mm, totalling 5 - 6 mm minimum final cured thickness.**

### Brush and trowel applied:

Apply in even layers using a stiff bristled brush or broom/ trowel on vertical surfaces and a rubber squeegee or stiff bristled brush/ trowel for horizontal surfaces. It is essential the first coat is well brushed or trowelled into the surface to ensure a good bond with the substrate.

Allow the first coat to harden (approx. 2 - 5 hours). Apply a second coat of Wykamol Tanking Slurry as soon as the first coat has hardened, but not fully set.

Apply the second coat at 90° angle to the first, ensuring a minimum overall thickness of 2 mm.

### Spray applied:

Use traditional wet mortar spraying equipment and processes, ensuring final coat provides a uniform thickness of at least 2 mm.

## CONDITIONS & LIMITATIONS


The product should not be applied in temperatures under 5°C and falling, or if temperatures are expected to fall below 5°C within 24 hours. Ensure the substrate temperature is not below 5°C before commencing application.

Avoid application in direct sunlight to prevent rapid drying out. If Wykamol Tanking Slurry dries out too rapidly between coats, repeat priming process.

When applying to environments that will contain aquatic life, such as ponds, always finish with Wykamol Technoseal DPM, and refer to the relevant data sheet, which is available upon request or can be downloaded from our website.

**Note:** Gypsum plaster must not be used in direct contact with Wykamol Tanking Slurry.

# WYKAMOL TANKING SLURRY

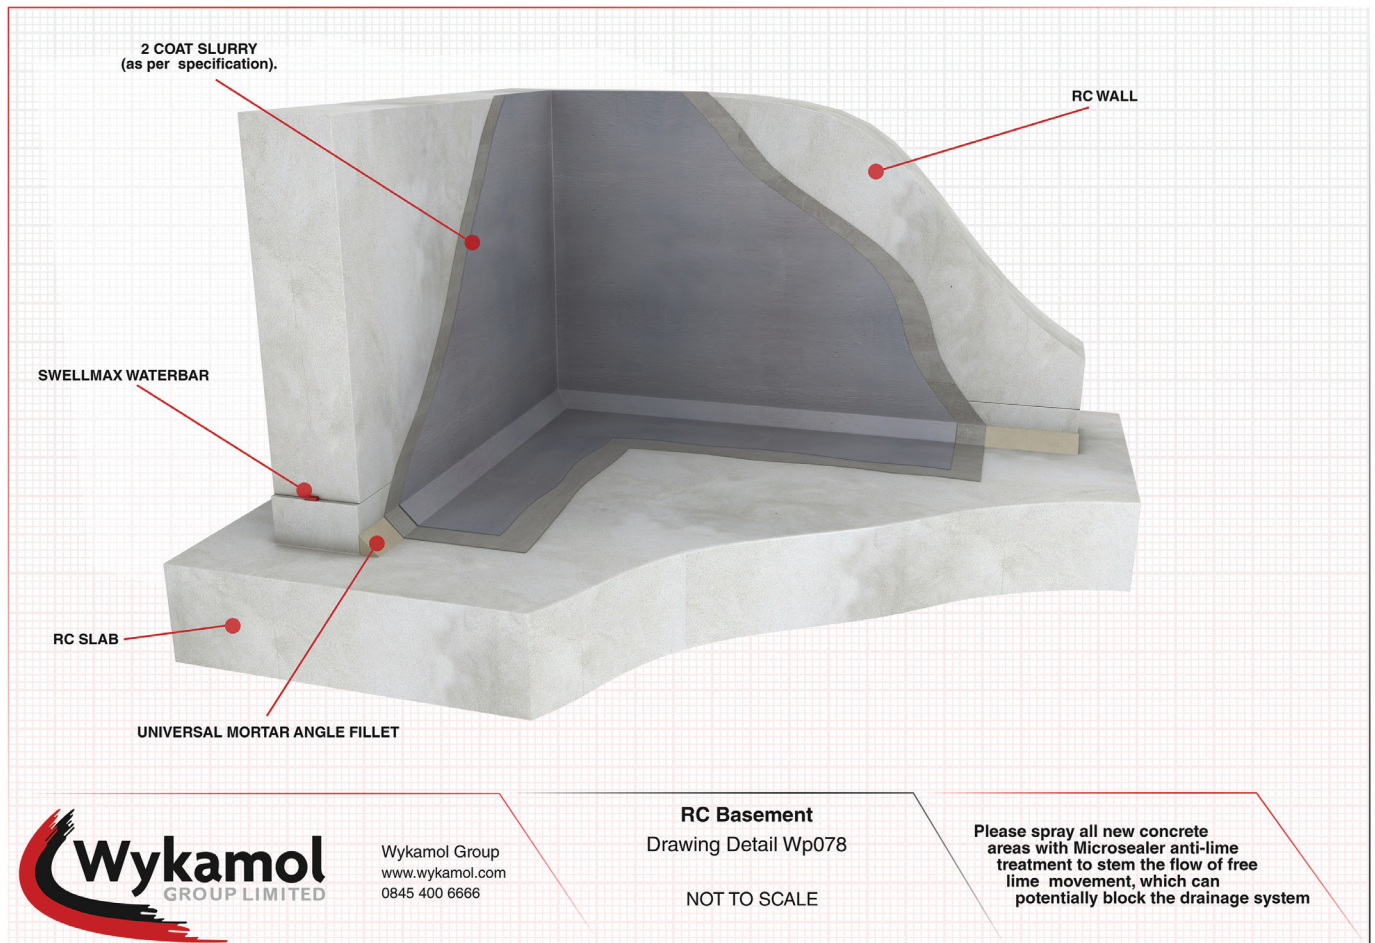

## CURING & VENTILATION

Curing procedures should be strictly adhered to. It is important that the surface of the slurry is protected from strong sunlight and drying winds, with either a suitable curing compound, polythene sheeting, damp hessian or similar, for a minimum of 48 hours.

If Wykamol Tanking Slurry will be left unprotected, fine mist spray the surface 3 - 4 times daily, for a minimum of 48 hours.

## OVERCOATING & FINISHING

Wykamol Tanking Slurry is suitable for overcoating once correctly and thoroughly cured. Plaster should take place using Wykamol's Renovation Plaster, ideally 48 hours after the final coat of Wykamol Tanking Slurry has been applied.

Repeat priming process as detailed in the substrate preparation section, prior to an application of Renovation

Plaster. Refer to relevant data sheet for application instructions, which is available upon request or can be downloaded from our website. If Wykamol Tanking Slurry has been applied as a DPC, breathable paint must be used on top of any finish. If redecoration is to occur 12 months after the DPC installation, non-breathable finishes may be considered.

However, the moisture content of the plaster and background must be in line with the recommendations of the supplier of the chosen finish.

**Note:** Wykamol Tanking Slurry must not be punctured by wall fixings, e.g. dry lining work etc.

## PACK SIZE AND COVERAGE


| Pack Size | Product Code  | Coverage at 2mm       |
|-----------|---------------|-----------------------|
| 20Kg      | NMDTANK20     | up to 7m <sup>2</sup> |
| 20Kg      | NMDTANKBUCK20 | up to 7m <sup>2</sup> |

## STORAGE & SHELF LIFE

Store in cool, dry conditions, off the ground. Protect from all sources of moisture and frost. Shelf life is 6 months from date of manufacture, when unopened, undamaged and stored correctly.

## HEALTH AND SAFETY

For further information and advice, please contact the Wykamol Technical Department and consult the safety data sheet, which is available upon request or can be downloaded from our website.

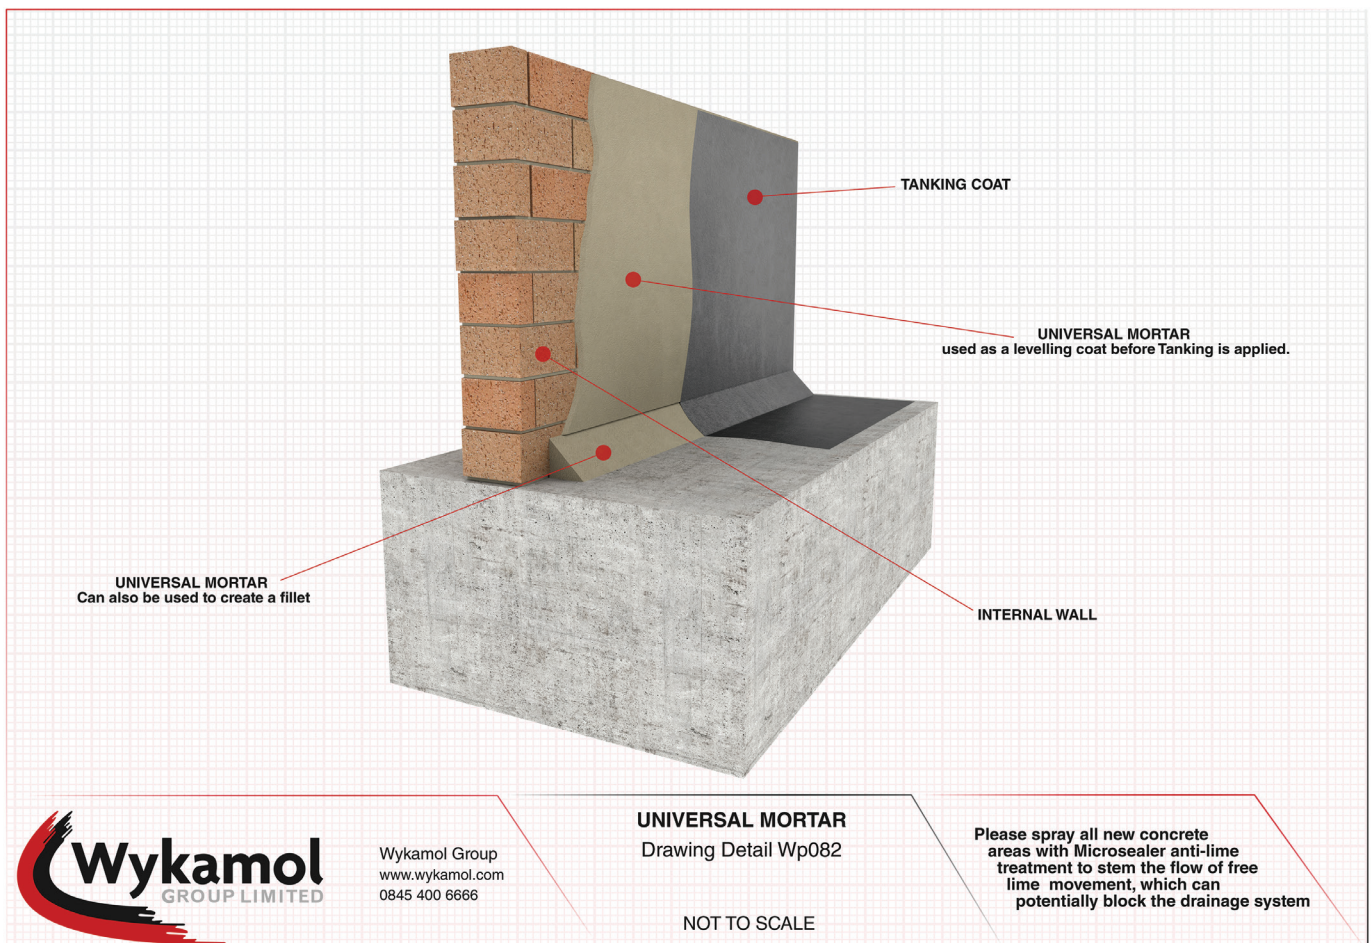

If you are using Wykamol Tanking Slurry on a brick or stone built wall please make sure you use HydraDry Universal Mortar, as a levelling coat for preparation as per diagram.

Boran Court, Network 65 Business Park, Hapton,  
Burnley Lancashire BB11 5TH  
t: +44 (0)1282 473 100 e: info@wykamol.com  
www.wykamol.com

Unit 3-5 Crayford Commercial Centre,  
Greyhound Way, Kent, DA1 4HF  
t: +44 (0)1322 318 830 e: info@tritonsystems.co.uk  
www.tritonsystems.co.uk

The information in this technical datasheet is given in good faith and was correct at the time of publication, but does not purport to be all inclusive. We reserve the right to update this information at any time without prior notice. All data is obtained through extensive testing in stringent laboratory conditions, however as we have no control over site conditions or work executed we accept no liability for incidental and/or consequential property damage arising out of the use of this product. The Wykamol Group's standard terms and conditions of sale apply.