

TECHNICAL DATA SHEET : CM8 CAVITY DRAIN **MESH** MEMBRANE

Issue 2 2018 12
WPTDS04

PRODUCT DESCRIPTION

The Wykamol range of cavity drain mesh membranes are high quality, structural waterproofing materials, with a choice of stud height for different drainage capacities and applications. CM8 Cavity Drain Mesh Membrane is a 8 mm studded membrane incorporating a tough HDPE mesh lathing welded to the front face, allowing the direct application of various plaster finishes, adhesive 'dabs' and plasterboards and delivering a grade 3 environment to BS8102:2009 and NHBC Chapter 5.4

TYPICAL USES

- Walls
- Above and below ground level
- Type C Waterproofing applications
- Damp-proofing applications

ADVANTAGES



HIGH PERFORMANCE BONDED MESH



PART OF A TYPE C CAVITY DRAIN MEMBRANE SYSTEM IN LINE WITH BS8102:2009



WATERPROOF, SALT INHIBITING, ROOT AND CONTAMINATE RESISTANT



CREATES A DRY, HABITABLE LIVING SPACE IN AREAS PREVIOUSLY SUFFERING FROM DAMP/WET CONDITIONS



EASILY CUT DOWN USING A SHARP BLADE



EASY TO FOLD AROUND WINDOWS AND DOORS



QUICK TO INSTALL - MINIMAL PREPARATION NEEDED TO WALL SURFACES



NO DRYING OUT PROCESS - REDECORATION CAN OCCUR IMMEDIATELY



LITTLE OR NO DAMAGE TO THE EXISTING STRUCTURE



PROPERTIES

Technical Data	Result	Test Standards
Material	HDPE	N/A
Unit Weight	0.505 Kg/m ²	N/A
Sheet Thickness	0.6 mm	EN 149-2
Stud Height	7 mm	N/A
Colour	Clear	N/A
Working Temperature	-50°C to +80°C	N/A
Softening Temperature	126°C	N/A
Tensile Strength MD	416 N	BS 12311-2
Tensile Strength CD	488 N	BS 12311-2
Water Vapour Resistance		BS EN 1931:2000
Resistance to Static Loading	>20 Kg	BS 12730
Reaction to Fire	Class F	BS EN 13501-1
Life Expectancy	Lifetime of Structure	

SUBSTRATE PREPARATION

1. Unsound plaster, render or screed should be removed and surfaces made level. This should be achieved using Wykamol's Universal Mortar, or a 3:1 sand:cement mix incorporating Renderproof Waterproofing Additive. Leave all new works to dry thoroughly before CM8 Mesh membranes are fixed.
2. In case of walls suffering from mould or masonry fungi, prior to fixing the membrane, remove surface contamination by brushing, then apply Microtech Biocide in line with the relevant Technical Data Sheet
3. If dry rot (*Serpula Lacrymans*) is present in the



TECHNICAL DATA SHEET : CM8 CAVITY DRAIN **MESH** MEMBRANE

Issue 2 2018 12
WPTDS04

SUBSTRATE PREPARATION CONTINUED

walls, this will require detailed assessment before proceeding. Please contact the Wykamol Technical Department for further advice.

- Above ground level it is recommended, that where possible, all sources of moisture are alleviated at the source using a DPC such as Ultracure, before applying CM8 Mesh Membrane. This reduces potential damage to masonry and timber etc.

APPLICATION

With studs facing the wall, fixing is carried out using Wykamol CM Plaster Plugs.

- Drill a hole through the centre of the stud. Take care when drilling holes to avoid excessive masonry dust from falling behind the cavity drain membrane.
- Place the chosen plug (with seal for all underground waterproofing applications) into the hole and drive the fixing home with a rubber mallet or club hammer.
- We would suggest that spacing between plug fixings should be no greater than 250-300 mm, to ensure a tight fix to the wall. However, this may vary depending on chosen finishes, dimensions of plasterboards and their exact application.

Above Ground:

CM8 Mesh Membrane should finish at solid floor and ceiling junctions.

APPLICATION CONDITIONS AND LIMITATIONS

Flat soffits below ground should never be lined with Wykamol CM8 Mesh Membrane as it requires a minimum slope of 10%.

Take care when running CM8 Mesh Membrane around internal and external corners to ensure the sheet is fixed tight to the angle, ensuring well defined edges for subsequent plastering works.

FINISHING

Plaster Finish:

Wykamol CM8 Mesh Membrane can be finished in accordance with standard plastering techniques

(BS 5492:1990) using proprietary lightweight plaster, such as No More Damp Renovation Plaster.

Coat 1 should be applied to fill the studs and cover the mesh. This is scratch finished and then allowed to set before applying a second coat, to a final overall thickness of 15 mm.

Please make reference to our Wykamol Plaster Specification which can be downloaded from our website.

Dry Lining:

Use a conventional bonding plaster in dabs, to a minimum thickness of 8 mm and covering at least 50% of the membrane surface area.

After the plastered, dry-lined or rendered surface has dried, the surface can be painted or wallpapered using the traditional methods and materials without delay.

Alternatively, a conventional 65 mm of sand and cement screed can be laid.

Normal decorating materials can be used as soon as the floor, screed or plaster finishes are dry.

While applying, ensure atmospheric moisture levels are below 70% RH.

Impermeable floor finishes should not be laid until screed moisture content is below 75% RH.

AFTERCARE

Wykamol CM8 Mesh membranes provide a dry, warm and habitable living space in basements and other areas suffering from chronically damp conditions. However, it is equally important that areas which lack natural ventilation are provided with adequate means of condensation control, especially in wet areas such as kitchens, bathrooms etc.

This is best achieved through the provision of an effective mechanical ventilation system. Please consult the Wykamol Technical Department for further advice.

PACK SIZE AND COVERAGE


Product Code	Pack Size	Coverage
CM8MESH2X10	2 m x 10 m	20 m ²
CM8MESH2X20	2 m x 20 m	40 m ²



TECHNICAL DATA SHEET : CM8 CAVITY DRAIN **MESH** MEMBRANE

Issue 2 2018 12
WPTDS04

ABOVE GROUND APPLICATIONS

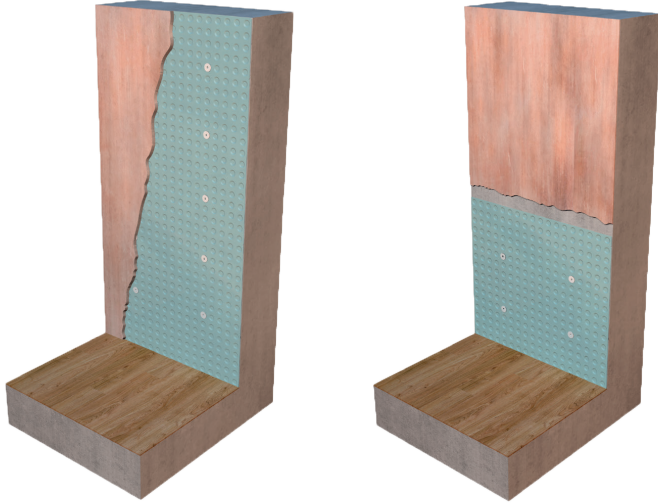

This is just an application example and does not necessarily represent the aesthetic properties of Wykamol products

STORAGE

Store in an upright position, under cover and away from high temperatures and open flames.

SHELF LIFE

The lifetime of the structure, when stored and installed in line with the datasheet recommendations.

HEALTH AND SAFETY

No specific hazards are likely to arise while using any Wykamol Waterproofing Membranes or ancillaries; neither are classified as hazardous in respect to CHIP II Regulations 1999. However, general precaution should be exercised in the use of drills etc. taking particular note of the special risks associated with working in confined spaces (basements) with restricted access/egress. The Wykamol Group always advise the use of appropriate PPE, including gloves, hard hat, goggles, high visibility jackets and steel toe cap boots.

For further information and advice, please contact the Wykamol Technical Department and consult the Safety Data Sheet, which is available upon request.

