

## TECHNICAL DATA SHEET : CM8 CAVITY DRAIN MEMBRANE

Issue 2 2018 11  
WPTDS03

### PRODUCT DESCRIPTION

The Wykamol range of cavity drain membranes are high quality, structural waterproofing materials, with a choice of stud height for different drainage capacities and applications. CM8 Cavity Drain Membrane is an 8 mm studded membrane, suitable for Type C waterproofing and delivering a grade 3 environment to BS8102:2009 and NHBC Chapter 5.4. CM8 is available in both 500g or 700g densities. We recommend using the CM8 HD700 when a heavier, denser membrane is deemed necessary by the Wykamol Technical Department. Please always take advice from our Technical Experts when making product selections.

### TYPICAL USES

- Walls
- Floors
- Vaults
- Tunnels
- Above and below ground level
- Waterproofing applications
- Damp-proofing applications

### ADVANTAGES

 **CREATES A DRY, HABITABLE LIVING SPACE IN AREAS PREVIOUSLY SUFFERING FROM DAMP/WET CONDITIONS**

 **WATERPROOF, SALT INHIBITING, ROOT AND CONTAMINATE RESISTANT**

 **QUICK TO INSTALL - MINIMAL PREPARATION NEEDED TO WALL SURFACES**

 **EASILY CUT DOWN USING A SHARP BLADE**


 **NO DRYING OUT PROCESS - REDECORATION CAN OCCUR IMMEDIATELY**

 **LITTLE OR NO DAMAGE TO THE EXISTING STRUCTURE**

 **LOW AND HIGH TEMPERATURE TOLERANCE**

 **PART OF A TYPE C CAVITY DRAIN MEMBRANE SYSTEM IN LINE WITH BS8102:2009**

 **CLEAR FOR EASY APPLICATION AND FIXING OF WYKAMOL PLUGS**

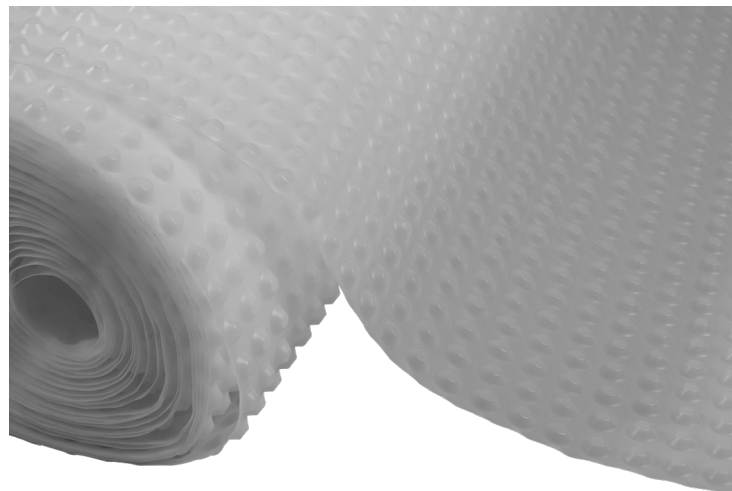

### PROPERTIES

Technical Data	Result	Test Standards
Material	HDPE	N/A
Unit Weight	0.5 and 0.7 Kg/m <sup>2</sup>	N/A
Sheet Thickness	0.45 and 0.55 mm	EN 149-2
Stud Height	7 mm	N/A
Colour	Clear	N/A
Water tightness, 60 kPa; 24h	Pass	EN 1928
Working Temperature	-50°C to +80°C	N/A
Softening Temperature	126°C	N/A
Tensile Strength MD	416 N	BS 12311-2
Tensile Strength CD	488 N	BS 12311-2
Water Vapour Resistance		BS EN 1931:2000
Resistance to Static Loading	>20 Kg	BS 12730
Reaction to Fire	Class F	BS EN 13501-1
Type of Application	Type V	N/A
Life Expectancy	Lifetime of Structure	

### SUBSTRATE PREPARATION

1. When used in new construction, the concrete slab must be laid in accordance with BS 8204-1:2003+A1:2009 to achieve a flat surface not deviating more than 5 mm from the underside of a 3000 mm straight edge.



## TECHNICAL DATA SHEET : CM8 CAVITY DRAIN MEMBRANE

Issue 2 2018 11  
WPTDS03

### SUBSTRATE PREPARATION CONTINUED

- Unsound plaster, render or screed should be removed and surfaces made level, with floors to the above tolerances. This can be achieved using Wykamol's Universal Mortar, or a 3:1 sand:cement mix incorporating Renderproof Waterproofing Additive. Leave all new works to dry thoroughly before CM8 membranes are fixed.
- In case of walls suffering from mould or masonry fungi, prior to fixing the membrane, remove surface contamination by brushing, then apply Microtech Biocide in line with the relevant Technical Data Sheet
- If dry rot (*Serpula Lacrymans*) is present in the walls, this will require detailed assessment before proceeding. Please contact the Wykamol Technical Department for further advice.
- Above ground level it is recommended, that where possible, all sources of moisture are alleviated at the source using a DPC such as Ultracure, before applying CM8 membrane. This reduces potential damage to masonry and timber etc.

### APPLICATION

With studs facing the wall, fixing is carried out using Wykamol CM Brick Plugs.

- We recommend an application of Wykamol Microsealer to the concrete walls and slab, before an application of CM8, to prevent lime efflorescence and dusting, which can block perimeter drainage channels.
- Drill a hole through the centre of the stud. Take care when drilling holes to avoid excessive masonry dust from falling into the cavity.
- Place the chosen plug (with seal for all underground waterproofing applications) into the hole and drive the fixing home with a rubber mallet or club hammer.
- We would suggest that spacing between plug fixings should be no greater than 600 mm, to ensure a tight fix to the wall. However, this may vary depending on the exact batten/board size and site conditions may dictate otherwise.
- Seal the membrane at the flanges (a band of membrane running along the edge where no studs are present) with Wykamol Tape.
- Ensure flanges run vertically on walls and are positioned in front of the preceding width of membrane. In the case of horizontal joints, the lower sheet is positioned to the front.

- Where there is or could be severe water ingress, joints may also be closed off with Wykamol Overseal Tape.
- Seal the stud to stud joints with Wykamol Rope.

### Vaulted Ceilings:

These can be successfully lined using Wykamol CM8, taking care to seal all mitred joints with Wykamol Tape/Rope/Overseal Tape/Corner Detail/Wykamol Fibre Tape

### APPLICATION CONDITIONS AND LIMITATIONS

Flat soffits below ground should never be lined with Wykamol CM8 Membrane as it requires a minimum slope of 10%.

Take care when running CM8 Membrane around internal and external corners to ensure the sheet is fixed tight to the angle, ensuring well defined edges for subsequent finishes.



### FINISHING

#### Stud Frame:

When using this finishing method, Wykamol Brick Plugs should be applied in a vertical line, roughly corresponding to the stud locations and battens (minimum of 25 x 38 mm). Fix the stud frame to the plugs using No. 10 screws (5 mm). If the plugs cannot be applied in a straight line, 'Gyproc' brackets can be used to hold the battens in place. Ensure the screw depth does not perforate the CM8 Membrane.

#### Dot and Dab Dry Lining:

On reasonably flat walls, Wykamol CM Brick Plugs can be used to provide a key for board adhesives. Their unique



## TECHNICAL DATA SHEET : CM8 CAVITY DRAIN MEMBRANE

Issue 2 2018 11  
WPTDS03


### FINISHING CONTINUED

serrated head allows for the dab to be applied directly to the head of the Brick Plug. For below ground applications, ensure the Brick Plugs have a rubber seal.

Use a conventional bonding plaster in dabs, to a minimum thickness of 8 mm and covering at least 50% of the membrane surface area.

### Floors:

CM8 Membrane may be overlaid with closed cell insulation before laying T&G flooring, ensuring a 10 mm expansion joint all around. Alternatively, a conventional 65 mm of sand and cement screed can be laid. However, site conditions may vary, therefore if doubt exists, please take advice from the Wykamol Technical Department. Normal decorating materials can be used as soon as the floor, screed or plaster finishes are dry. While applying, ensure atmospheric moisture levels are below 70% RH. Impermeable floor finishes should not be laid until screed moisture content is below 75% RH.

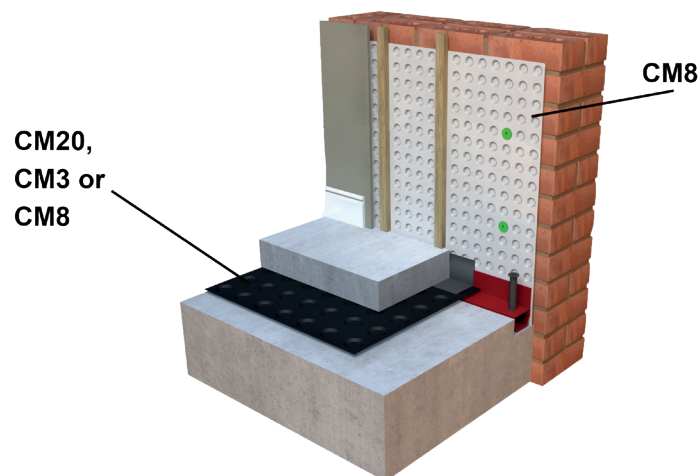

### AFTERCARE

Wykamol CM8 membranes provide a dry, warm and habitable living space in basements and other areas suffering from chronically damp conditions. However, it is equally important that areas which lack natural ventilation are provided with adequate means of condensation control, especially in wet areas such as kitchens, bathrooms etc.

This is best achieved through the provision of an effective mechanical ventilation system. Please consult the Wykamol Technical Department for further advice.

### PACK SIZE AND COVERAGE

Product Code	Pack Size	Coverage
CM82X20	2 m x 20 m	40 m <sup>2</sup>
CM8HD2X20	2 m x 20 m	40 m <sup>2</sup>
CM8HD2.4X20	2.4 m x 20 m	48 m <sup>2</sup>
CM82.4X20	2.4 m x 20 m	48 m <sup>2</sup>

### MANUFACTURER INFORMATION

This product is manufactured by:  
Wykamol Group Ltd  
Unit 3 Boran Court, Network 65 Business Park  
Hapton, Burnley  
Lancashire  
BB11 5TH  
United Kingdom

### STORAGE

Store in an upright position, under cover and away from high temperatures and open flames.

### SHELF LIFE

The lifetime of the structure, when stored and installed in line with the datasheet recommendations.

### HEALTH AND SAFETY

No specific hazards are likely to arise while using any Wykamol Waterproofing Membranes or ancillaries; neither are classified as hazardous in respect to CHIP II Regulations 1999. However, general precaution should be exercised in the use of drills etc. taking particular note of the special risks associated with working in confined spaces (basements) with restricted access/egress. The Wykamol Group always advise the use of appropriate PPE, including gloves, hard hat, goggles, high visibility jackets and steel toe cap boots.

For further information and advice, please contact the Wykamol Technical Department and consult the Safety Data Sheet, which is available upon request.

