

## TECHNICAL DATA SHEET : WYKAMOL CM MEMBRANE PLUGS

Issue 1 (23.05.2018)

WPTDS10

### PRODUCT DESCRIPTION

The Wykamol Membrane Plugs are fixings to apply cavity drain membranes to the walls of both above and below ground structures. They ensure a water tight application of the Wykamol Cavity Drain Membrane Systems. Wykamol Plaster Plugs and Surefix Brick plugs are of a high quality and can be used in a range of applications and on multiple substrate types. The tailor made Thermoplastic Elastomer seal ensures application of the membrane is water tight.

### CM BRICK PLUGS



### TYPICAL USES

Wykamol Surefix Brick Plugs can be used:


- To apply cavity drainage membranes such as CM3, CM8 and CM20
- On brick
- On stone
- On concrete
- In damp-proofing applications
- In waterproofing applications

### PROPERTIES

Pull Out Performance	Surefix Brick Plug
Concrete	0.55 kN
Solid Brick	0.5 kN
Lightweight Block	0.3 kN
Shear Loading	0.038 kN
Application Temp °C	
-20 to +90	
Manufacturing Material	
Plug	High Density Polypropylene
Seal	Thermoplastic Elastomer

### ADVANTAGES

- **A REINFORCED HEAD TO PREVENT DAMAGE WHEN KNOCKING IN THE PLUG**
- **60 MM IN LENGTH - SUITABLE FOR BOTH SINGLE SKIN AND CAVITY WALLS**
- **PROVIDES A WATERPROOF SEAL WHEN USED WITH SEALS PROVIDED (AVAILABLE WITH OR WITHOUT SEALS)**
- **AVAILABLE WITH OR WITHOUT SEALS TO CATER FOR MULTIPLE APPLICATION TYPES**
- **LARGE 35 MM HEAD PROVIDES OPTIMUM SURFACE AREA FOR FINISHES**
- **WORKS IN CONJUNCTION WITH THE WYKAMOL WATERPROOFING SOLUTIONS CM MEMBRANE SYSTEM**
- **SERRATED HEAD FOR IMPROVED ADHESION OF FINISHES**
- **TAILOR MADE SEAL SPECIFIC TO PLUG**

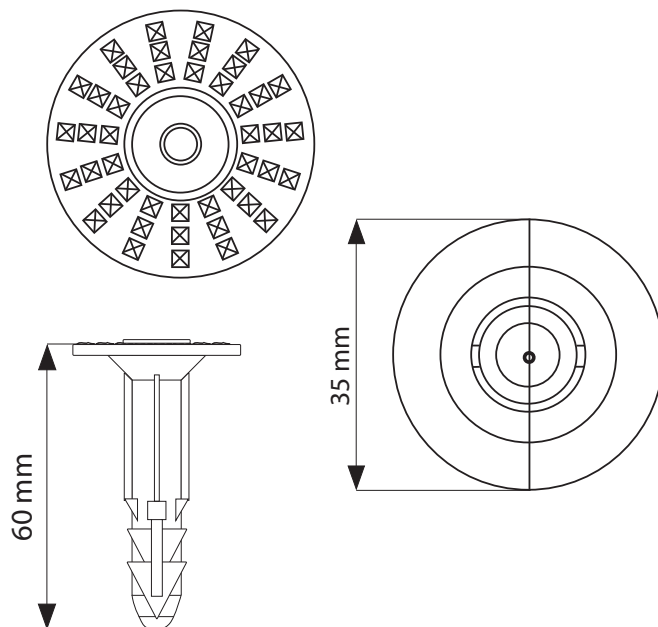

Product Description	Product Code	Pack Size
CM Brick Plugs	CMBRICKPLUG100	100
CM Brick Plugs with Seals	CMBRICKSEAL100	100
CM Brick Plugs with Seals	CMBRICKSEAL200	200



## TECHNICAL DATA SHEET : WYKAMOL CM MEMBRANE PLUGS

Issue 1 (23.05.2018)  
WPTDS10

### CM PLASTER PLUGS



### TYPICAL USES

Wykamol Plaster Plugs can be used:

- To apply mesh membrane systems such as CM3 Mesh and CM8 Mesh
- Where a plaster application is necessary
- Where a dot and dab plaster board application is necessary
- To secure membranes to walls on systems where a free standing frame is to be used

### PROPERTIES

Pull Out Performance	Surefix Brick Plug
Concrete	0.43 kN
Solid Brick	0.4 kN
Lightweight Block	0.28 kN
Shear Loading	0.025 kN
Application Temp °C	-30 to +90
Manufacturing Material	
Plug	High Density Polypropylene
Seal	Thermoplastic Elastomer

Product Description	Product Code	Pack Size
CM Plaster Plugs	CMPLASTERPLUG100	100
CM Plaster Plugs	CMPLASTERPLUG200	200
CM Plaster Plugs with Seals	CMPLASTERSEAL200	200

### ADVANTAGES

- **A REINFORCED HEAD TO PREVENT DAMAGE WHEN KNOCKING IN THE PLUG**
- **60 MM IN LENGTH - SUITABLE FOR BOTH SINGLE SKIN AND CAVITY WALLS**
- **PROVIDES A WATERPROOF SEAL WHEN USED WITH SEALS PROVIDED (AVAILABLE WITH OR WITHOUT SEALS)**
- **AVAILABLE WITH OR WITHOUT SEALS TO CATER FOR MULTIPLE APPLICATION TYPES**
- **LARGE 50 MM HEAD PROVIDES OPTIMUM SURFACE AREA FOR PLASTER, DOT AND DAB PLASTERBOARD ETC**
- **WORKS IN CONJUNCTION WITH THE WYKAMOL WATERPROOFING SOLUTIONS CM MEMBRANE SYSTEM**
- **TAILOR MADE SEAL SPECIFIC TO PLUG**

